

CAPS & CONNECTORS

Vinyl Vacuum Caps



Can be used for capping lines and hoses while testing carburetors, emission control systems, vacuum lines etc. Color coded for size identification.

Auveco Part No.	I.D.	Fits Tube O.D.	Color	Length	Unit Pkg.
18202	1/8"	3/16"	Blue	5/8"	50
18203	3/16"	1/4"	Red	5/8"	50
18204	1/4"	5/16"	White	5/8"	50
18205	5/16"	3/8"	Black	5/8"	50

Rubber Caps

(Special Heat Resistant EPDM Rubber)

Ford - GM - Chrysler



Can be used for capping lines and hoses while testing carburetors, emission control systems, vacuum lines, etc.



Auveco Part No.	Fits Tube O.D.	Inside Length	Unit Pkg.
12209	1/8"	9/16"	25
4440	3/16"	9/16"	25
16264			100
19000	3/16"	1-1/4"	25
4439	1/4"	9/16"	25
19001	1/4"	1-1/4"	25

Auveco Part No.	Fits Tube O.D.	Inside Length	Unit Pkg.
19002	5/16"	9/16"	25
12907	5/16"	1-1/4"	25
12210	3/8"	31/32"	25
19003	3/8"	1-1/2"	25
12908	1/2"	11/16"	10

NYLON CONNECTORS



12929

Connector
1/8" x 1/8"

UNIT PACKAGE: 10



12936

Connector
1/8" x 1/4"

UNIT PACKAGE: 10



12935

Connector
3/16" x 1/4"

UNIT PACKAGE: 10



12930

Connector
1/8" x 3/16"

UNIT PACKAGE: 10



12937

Connector
3/16" x 3/16"

UNIT PACKAGE: 10




12931

Connector
1/4" x 1/4"

UNIT PACKAGE: 10

Sec. 11

NYLON CONNECTORS



12946

Connector
5/16" x 5/16"

UNIT PACKAGE: 10



12938

Connector
3/8" x 1/4"

UNIT PACKAGE: 10



12934

Connector
3/8" x 3/8"

UNIT PACKAGE: 10




18835

(E1ZE-9E499-EA)
Nylon

3/16" (Both)

Emission Harness
Connector
Ford

UNIT PACKAGE: 25



1/8" All Ends

12923

Tee

UNIT PACKAGE: 10




1/8" 3/16" 1/8"

12916

Tee

UNIT PACKAGE: 10




1/8" 3/16" 3/16"

12924

Tee

UNIT PACKAGE: 10



3/16" 3/16" 1/8"

12926

Tee

UNIT PACKAGE: 10



1/8" 1/8" 1/4"

12917

Tee

UNIT PACKAGE: 10




3/16" All Ends

12918

Tee

UNIT PACKAGE: 10




1/4" 3/16" 3/16"

12919

Tee

UNIT PACKAGE: 10

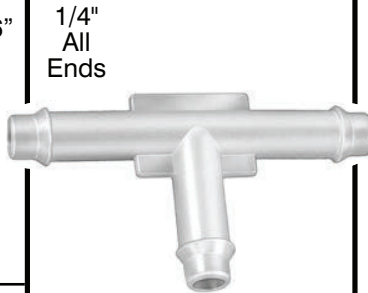


1/4" All Ends

17629

Tee

UNIT PACKAGE: 10



1/4" 1/4" 3/16"

11738

Tee

UNIT PACKAGE: 10




3/16" 3/8" 3/8"

12941

Tee

UNIT PACKAGE: 10

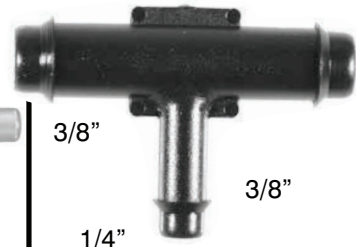

3/8" 3/8" 1/4"

12921

Tee

UNIT PACKAGE: 10




1/4" 3/8" 3/8"

12922

Tee

UNIT PACKAGE: 10

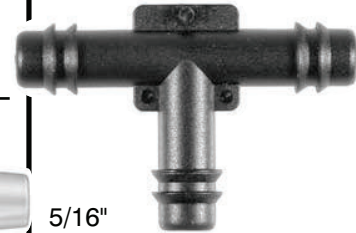

5/16" All Ends

12920

Tee

UNIT PACKAGE: 10



3/8" All Ends

12925

Tee

UNIT PACKAGE: 10

NYLON CONNECTORS



3/16"
All Ends

12927

Y Connector

UNIT PACKAGE: 10



1/4"
All Ends

12943

Y Connector

UNIT PACKAGE: 10



5/16"
All Ends

12944

Y Connector

UNIT PACKAGE: 10



12947

Elbow
1/8" x 3/16"

UNIT PACKAGE: 10



12932

Elbow
3/16" x 3/16"

UNIT PACKAGE: 10



5/32"
(Both)

3/16"

18836

(E1ZE-9E499CA)

Emission Harness
Elbow Connector
Ford

UNIT PACKAGE: 25



12948

Elbow
3/16" x 1/4"

UNIT PACKAGE: 10



12933

Elbow
1/4" x 1/4"

UNIT PACKAGE: 10



12940

F Connector
3/16" All Ends

UNIT PACKAGE: 10



12939

Cross Connector
3/16" All Ends


UNIT PACKAGE: 5



11419

4 Way Connector
3/16" All Ends

UNIT PACKAGE: 25

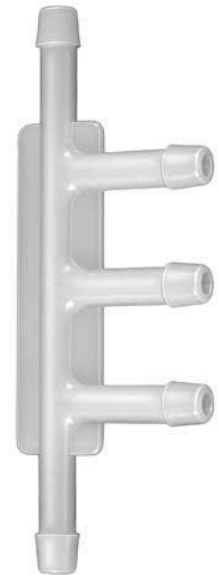

12949

5 Way Tee
3/16" All Ends

UNIT PACKAGE: 5

NYLON CONNECTOR CROSS REFERENCE

O.E.M. NUMBER CHART

Auveco Part No.	OEM No.	Auveco Part No.	OEM No.	Auveco Part No.	OEM No.
11419GM:	560692, 22508803	12925GM:	14023108	12935GM:	1621253, 472812
	Ford: 383847-S		Ford: 388131-S		Ford: 800843
11738GM:	3963228	12926GM:	14031114		AMC: 3239826
12916GM:	14025274, 14031144	12927GM:	10003617, 22508052	12936GM:	14017702
	Ford: 383016		Ford: 383031	12937GM:	560625, 22508051
	Chry: 4241362		AMC: 3236813		Ford: 383003, 389138
12917GM:	1610403	12928GM:	14046514		Chry: 4104998
12918GM:	357020, 272766, 22508050	12929GM:	14047034	12938Ford:	E0VE-9K319AB
	Ford: 373846-S		Ford: 383000	12939GM:	354400
	Chry: 3671410	12930GM:	14017701		Ford: 387042
	AMC: 3673945		Ford: 383001		Chry: 4241054
12919GM:	1617333, 10003294	12931GM:	1614858, 14004876, 10017487	12940GM:	14029095
	Ford: 388034		Ford: 383005	12941GM:	14031149
	GM: 6466355	12932GM:	556992, 14031145, 22508049	12943GM:	10004121
	Chry: 4167810		Ford: 387065		Chry: 4019472
12921GM:	472814		Chry: 4100727		AMC: 4006848
	Ford: D9AE-9E645AA		12933Ford:	12944Chry:	4179982
12922GM:	472815		Chry: 387074	12946Chry:	4179981
	Ford: 801471	12934GM:	22505958	12947GM:	14017779
12923GM:	14017705		Chry: 4201198	12948Ford:	387980
	Ford: 3895904			12949Ford:	384111
	Chry: 3751212				AMC: 3237451
12924GM:	14017780				



**Nylon Hose Connectors
Barbed On Both Ends**

Auveco Part No.	Hose Size	Unit Pkg.
10101*	1/8" x 1/8"	10
10102	3/16" x 3/16"	10
10103	1/4" x 1/4"	10
10104	5/16" x 5/16"	10
10105	3/8" x 3/8"	10
16961	1/2" x 1/2"	10

*Single Barb On Each End



**Nylon Reducer Connectors
Barbed On Both Ends**

Auveco Part No.	Hose Size	Unit Pkg.
10106	1/4" x 3/16"	10
10107	3/8" x 1/4"	10



**Nylon Tubing & Hose Tee Connectors
Barbed On All Ends**

Auveco Part No.	Hose Size I.D.	Unit Pkg.
10108	5/32" x 5/32" x 5/32"	10
10109	3/16" x 3/16" x 3/16"	10
10110	1/4" x 1/4" x 1/4"	10
14813	5/16" x 5/16" x 5/16"	10
11228	3/8" x 3/8" x 3/8"	10
11229	1/2" x 1/2" x 1/2"	10



10697
Nylon Tee Connector
1/8" x 1/8" x 1/8"

UNIT PACKAGE: 10

CONNECTORS

(ILLUSTRATIONS ACTUAL SIZE)



11321

Butyrate

For 1/8", 1/4" or 3/8"
Universal Tubing Connector

For use with Vacuum and Windshield Washer Tubing

Not For Use In Fuel Line

UNIT PACKAGE: 10



10368

Butyrate

3-Way Universal
Break-Off Tee
For 1/8" 1/4" and 3/8" Tubing

Not For Use In Fuel Line

UNIT PACKAGE: 5

RUBBER CONNECTOR



16654

Santoprene Rubber

UNIT PACKAGE: 25

High-Density Black Polyethylene Tubing & Hose Elbows



Non-Corrosive

Auveco Part No.	Pipe Thread	Hose Size	Unit Pkg.
-----------------	-------------	-----------	-----------

11217	1/8"	3/16" I.D.	10
11220	1/4"	3/8" I.D.	10

High-Density Black Polyethylene Tubing & Hose Elbow



**Non-Corrosive
Barbed On Both Sides**

Auveco Part No.	Hose Size	Unit Pkg.
-----------------	-----------	-----------

11224	3/8" x 3/8" I.D.	10
-------	------------------	----



High-Density Black Polyethylene Tubing & Hose Tee Connector Non-Corrosive


Auveco Part No.	Pipe Thread	Hose Size	Unit Pkg.
-----------------	-------------	-----------	-----------

11226	1/4"	1/4" x 1/4" I.D.	10
-------	------	------------------	----


Sec. 11 AIR LINE COUPLINGS & ACCESSORIES

(Illustrations Are Not Actual Size)


210 Series: Push-to-connect, pin-type hose couplings designed for one-way shutoff in 1/4" capacity. **Average flow: 18 cfm** at 90 PSIG (6.2 bar) inlet and 10 PSIG (0.69 bar) pressure drop. Maximum inlet pressure: 250 PSIG (17 bar). Zinc chromate finish.




16045
1/4" Female NPT
UNIT PKG: 5



16046
1/4" Male NPT
UNIT PKG: 5



16049
1/4" Female NPT
UNIT PKG: 5



16051
1/4" Male NPT
UNIT PKG: 5



16052
1/4" Hose Stem I.D.
UNIT PKG: 5


MS Series: For use with industrial interchange style connectors. Push-to-connect type designed for one-way shutoff in 1/4" capacity. **Average flow: 36 cfm** at 90 PSIG (6.2 bar) inlet and 10 PSIG (0.69 bar) pressure drop. Maximum inlet pressure: 250 PSIG (17 bar). Zinc Chromate finish.




16066
1/4" Female NPT
Brass
UNIT PACKAGE: 5



16067
1/4" Male NPT
UNIT PACKAGE: 5




16070
1/4" Female NPT
UNIT PACKAGE: 5



16071
1/8" Male NPT
UNIT PACKAGE: 5



16072
1/4" Male NPT
UNIT PACKAGE: 5

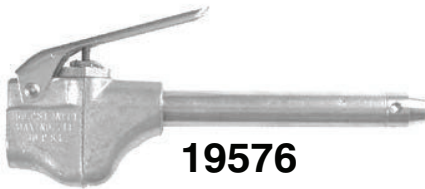


19576

Safety lever blow gun easily controls air flow making it ideal for hundreds of automotive and industrial uses in small or large industrial plants, service stations, garages, etc. Zinc alloy and brass construction.

Meets OSHA 150 PSI Inlet, Max. Nozzle 30 PSI SCFM 10.0 @ 100 PSI. 1/4" NPT air inlet.

UNIT PACKAGE: 1



19578

Siphon Spray Nozzle. Accessory For 19577 Blow Gun. For adding moisture or solvent to the air stream. Unique dual thread design permits use on all blow guns with 7/16"-27 and 1/8" NPS threads. O-ring seal creates an air-tight assembly. Aluminum body construction.

UNIT PACKAGE: 1




19577

Compact safety lever blow gun. Includes a safety nozzle and a non-safety rubber tip nozzle. Features an easy to use hang-up hook. Chrome plated zinc alloy construction.

Meets OSHA 150 PSI Inlet, Max. Nozzle 30 PSI. Safety tip SCFM 11.7 @ 100 PSI. Non-safety tip 12.9 @ 100 PSI. 1/4" NPT air inlet

UNIT PACKAGE: 1



19579

Rubber Blow Gun Tip. Accessory For 19577 Blow Gun. For positive leak-proof connection when blowing out any fluids where a metal tip could mar the finish. Unique dual thread design permits use on all blow guns with 7/16"-27 and 1/8" NPS threads. O-ring seal creates an air-tight assembly. Brass body construction.

UNIT PACKAGE: 2

CLEAR FLEXIBLE VINYL (PVC) TUBING Sec. 11



Our tubing has a broad range of chemical resistance to acids, alkalis and solvents. It's ideal for use in industrial air pressure line applications, in the food industry (FDA approved), for potable water, and for various gases and chemicals. Not for use with gasoline.

The Clear Flexible Tubing can be used with our connectors which are cataloged on pages 134. The tubing can also be installed with our Hose Clamps (refer to the alphabetical index).

Auveco Part No.	I.D.	O.D.	Wall Thickness	*Maximum Suggested Working Pressure (PSI @ 70 F)	Unit Pkg.
14801	1/8"	1/4"	1/16"	59	100 Ft.
14802	3/16"	5/16"	1/16"	51	100 Ft.
14803	1/4"	3/8"	1/16"	51	100 Ft.
14804	5/16"	7/16"	1/16"	48	100 Ft.
14805	3/8"	1/2"	1/16"	41	100 Ft.
14806	3/8"	5/8"	1/8"	55	100 Ft.
14807	1/2"	5/8"	1/16"	28	100 Ft.
14808	1/2"	3/4"	1/8"	41	100 Ft.

*We recommend verification by testing of the size and material to be used.

Red Air Hose



Male Brass Fitting

Four spiral reinforced EPDM rubber construction offers superior durability and excellent flexibility. Limited oil resistance. Coupled with brass fittings. Maximum working pressure is 300 P.S.I.

Auveco Part No.	I.D.	Description	Unit Pkg.
-----------------	------	-------------	-----------

Impact Tool Air Hose

15538	3/8"	1/4" Male Pipe Thread Fittings	25' Roll
15539	3/8"	1/4" Male Pipe Thread Fittings	50' Roll

Black O.E.M. Heater Hose

Meets or exceeds SAE20R3 specifications. O.E.M. grade EPDM hose that withstands the abuse of corrosive additives, heat, cold, ozone, weather and abrasion



Auveco Part No.	I.D.	Unit Pkg.
15540	1/2"	50' Roll
15541	5/8"	50' Roll
15542	3/4"	50' Roll

Sec. 11

VACUUM & WINDSHIELD WASHER TUBING

For a Complete Listing of Barbed Brass Fittings See Page 238.

- Meets SAE J1037 Type 2 Specifications
- EPDM Rubber
- Packed in coils of 25 and 50 ft. lengths



Auveco Part No.	I.D.	O.D.		Unit Pkg.
4453	7/64"	9/32"	Fits 1/8" Nipple	25'
4454	7/64"	9/32"	Fits 1/8" Nipple	50'
4456	5/32"	5/16"	Fits 3/16" Nipple	25'
4457	5/32"	5/16"	Fits 3/16" Nipple	50'
4459	7/32"	13/32"	Fits 1/4" Nipple	25'
4460	7/32"	13/32"	Fits 1/4" Nipple	50'
4462	9/32"	15/32"	Fits 5/16" Nipple	25'
4463	9/32"	15/32"	Fits 5/16" Nipple	50'

Fuel Line Hose

(Not For Electronic Fuel Injection)

For a Complete Listing of Barbed Brass Fittings See Page 238.

- Meets the following O.E.M. Specifications: (GM: 6165-M) (SAE J30R7) (Chrysler MSEA219)
- Packaged in coils of 25 and 50 ft. lengths
- Auveco Fuel Line Hose is of the highest quality and meets all O.E.M. specifications. It has a special chemical resistant interior, a single braid, and a neoprene exterior for maximum life and durability. For temperature range from -29°F to 257°F.
- Auveco Hose is designed for gas and diesel fuel lines (except Electronic Fuel Injection), emission control devices, and crankcase ventilation. In addition to the automotive applications, this hose is widely used on lawn mowers, marine motors, tractors and construction equipment to mention only a very few.



Auveco Part No.	Size	Working Pressure	Unit Pkg
17085	3/16" I.D. x 13/32" O.D.	50 PSI	25'
4464	1/4" I.D. x 1/2" O.D.	50 PSI	25'
4465	1/4" I.D. x 1/2" O.D.	50 PSI	50'
4466	5/16" I.D. x 9/16" O.D.	50 PSI	25'
4467	5/16" I.D. x 9/16" O.D.	50 PSI	50'
4468	3/8" I.D. x 5/8" O.D.	35 PSI	25'

Electronic Fuel Injection Hose

- Meets or exceeds SAE 30R9 specifications.
- Quality fluoroelastomer tube and CM cover handles virtually every fuel on the market.
- Burst strength exceeds 900 PSI.
- 180 PSI working pressure



Auveco Part No.	Size	Unit Pkg.	Use With Auveco Clamp No.
19271	1/4" I.D. x 1/2" O.D.	10 Ft.	15860
19272	5/16 I.D. x 9//16" O.D.	10 Ft.	15861
19273	3/8" I.D. x 5/8" O.D.	10 Ft.	15862



20900 Hose Cutter

Razor sharp blade cleanly cuts heater hoses, fuel line hoses and any other type of flexible hose up to 1-1/4" diameter. The stainless steel blade is reversible for double the life. The pliers are made of glass-filled gray nylon for strength. Includes a locking hoop for safe storage. Overall length: 9-1/2"

UNIT PACKAGE: 1